


22313 EK

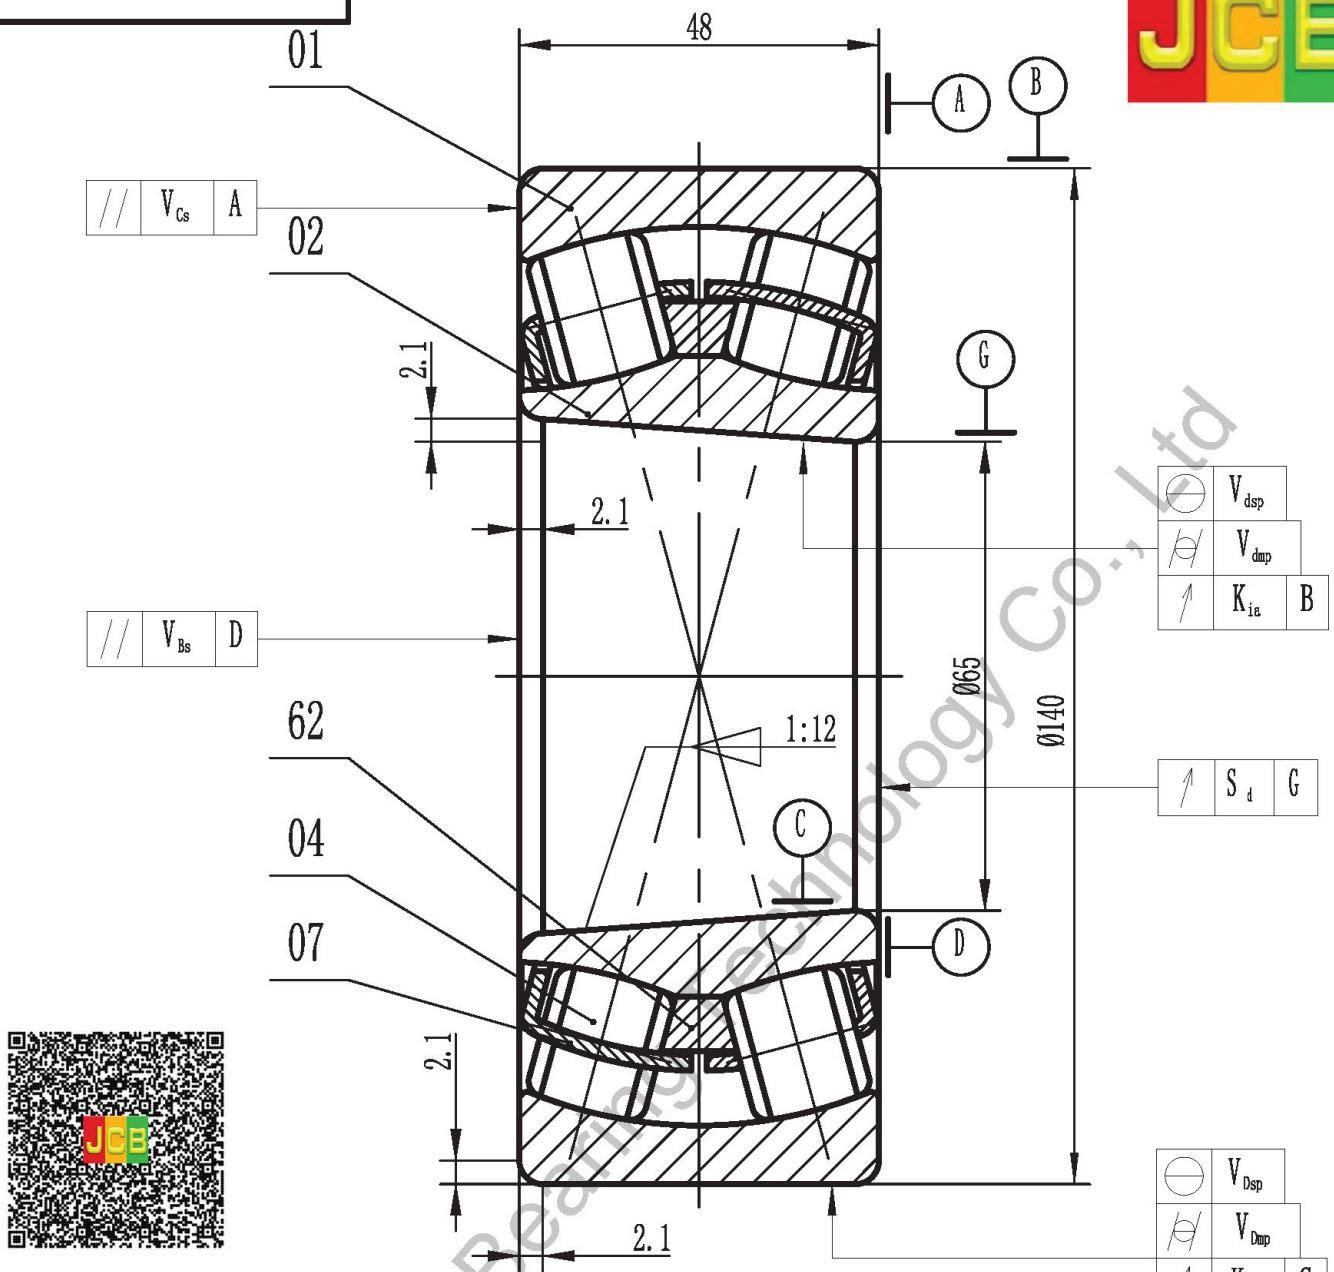

1. Tolerance of running accuracy are according to relevant state standard;
2. The value of the basic group of radial clearance: min 0.100 max 0.135;
3. Rated load: Cr=640 kN Cor=740 kN.

| 62  | Guide ring |     | Steel 20—GB699                     |             |       |        |
|-----|------------|-----|------------------------------------|-------------|-------|--------|
| 07  | Cage       |     | Steel St 52-EN 10025:1990 + A:1993 |             |       |        |
| 04  | Roller     |     | Steel 100Cr6—ISO 683-17:1999       |             |       |        |
| 02  | Inner ring |     | Steel 100Cr6—ISO 683-17:1999       |             |       |        |
| 01  | Outer ring |     | Steel 100Cr6—ISO 683-17:1999       |             |       |        |
| No. | Name       | Qty | Material                           | Unit        | Total | Remark |
|     |            |     |                                    | Weight (kg) |       |        |

Luoyang JCB Bearing Technology Co., Ltd  
 Contact information  
 Company Address : No. 285, Fenghua road,  
 Luoyang, Henan, China.  
 Postal code : 471000  
 Phone : 86-379-68611678  
 Fax : 86-379-68611679  
 E-mail: sales@jcb-bearing.com  
 Reserved E-mail: sales@sphericalrollerbearing.net  
 Website: www.jcb-bearing.com  
 www.sphericalrollerbearing.net

## Spherical Roller Bearing

22313 EK

|                                         |  |  |  |            |       |
|-----------------------------------------|--|--|--|------------|-------|
|                                         |  |  |  | Weight(kg) | Scale |
| S                                       |  |  |  |            | _____ |
| Total page 6                            |  |  |  | Page No. 1 |       |
| Luoyang JCB Bearing Technology Co., Ltd |  |  |  |            |       |