

/// V_{Cs} A

01


02

62

04

07

/// V_{Bs} D

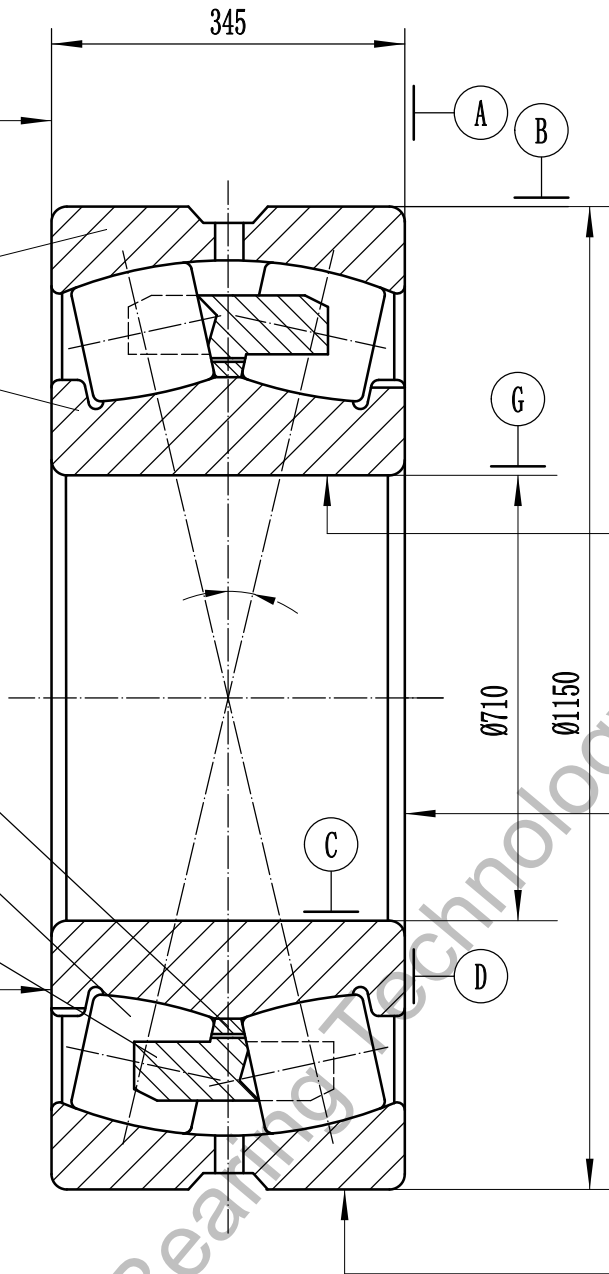

⊖ V_{dsp}
 / V_{dmp}
 / K_{ia} B

/ S_d G

⊖ V_{Dsp}
 / V_{Dmp}
 / K_{ea} C
 / S_D A

- 1、Tolerance of running accuracy are according to relevant state standard;
- 2、The value of the basic group of radial clearance:min **** max ****;
- 3、Rated load: Cr= **** kN Cor= **** kN.

62	Guide ring		Steel 20—GB/T699				
07	Cage		Brass CuZn39Pb2-EN 1652:1997				
04	Roller		Steel 100CrMnSi6-4—ISO 683-17:1999				
02	Inner ring		Steel 100CrMnSi6-4—ISO 683-17:1999				
01	Outer ring		Steel 100CrMnSi6-4—ISO 683-17:1999				
No.	Designation	Qty	Material	unit	toatl	Remark	
				Weight (kg)			
Luoyang JCB Bearing Technology Co., Ltd Contact information Company Address : No. 285, Fenghua road, Luoyang, Henan, China. Postal code : 471000 Phone :86-379-68611678 Fax : 86-379-68611679 E-mail: sales@jcb-bearing.com Reserved E-mail: sales@sphericalrollerbearing.net Website: www.jcb-bearing.com www.sphericalrollerbearing.net			Spherical Roller Bearing	231/710 CA/W33			
						Weight(kg)	Scale
				S			——
				Total page 5		Page No. 1	
				Luoyang JCB Bearing Technology Co., Ltd			