




V<sub>Cs</sub> A

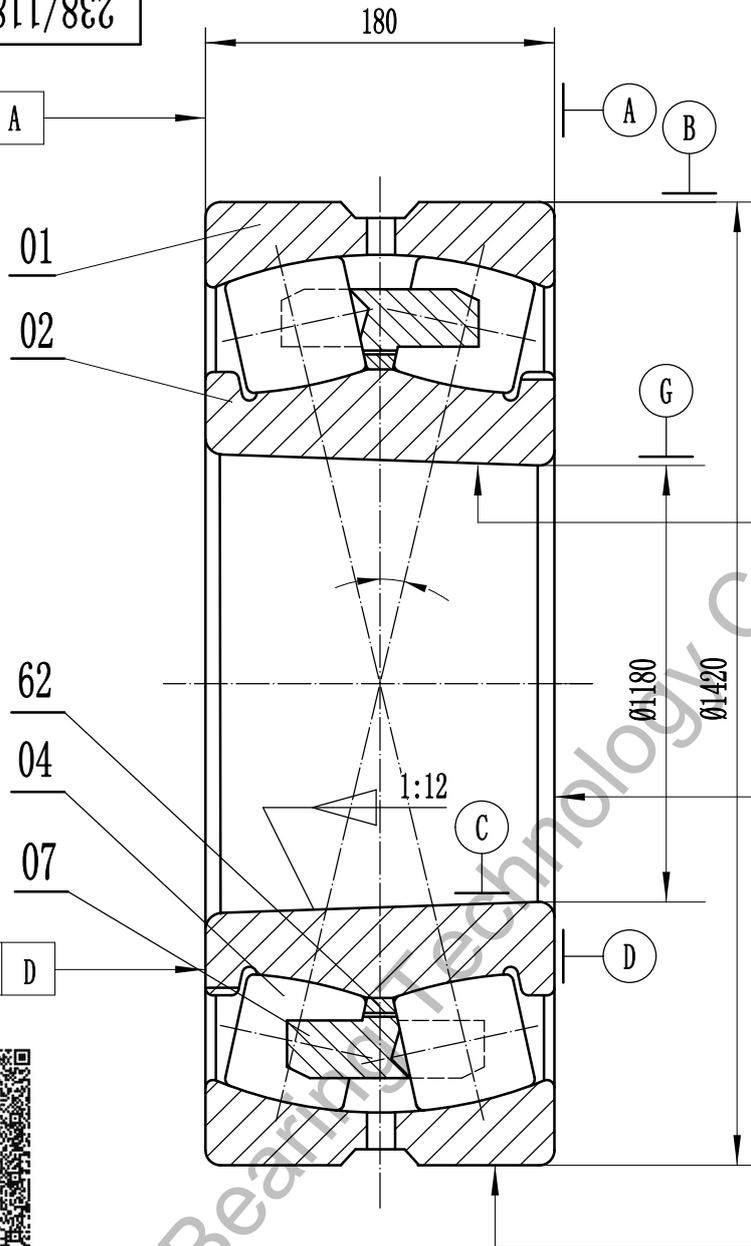

V<sub>dsp</sub>  
V<sub>dmp</sub>  
K<sub>ia</sub> B

S<sub>d</sub> G

V<sub>Bs</sub> D

V<sub>Dsp</sub>  
V<sub>Dmp</sub>  
K<sub>ea</sub> C  
S<sub>D</sub> A



- 1、Tolerance of running accuracy are according to relevant state standard;
- 2、The value of the basic group of radial clearance:min \*\*\*\* max \*\*\*\*;
- 3、Rated load: Cr= \*\*\*\* kN Cor= \*\*\*\* kN.

62	Guide ring	1	Steel 20—GB/T699			
07	Cage	2	Steel St 52-EN 10025:1990 + A:1993			
04	Roller		Steel 100CrMnSi6-4—ISO 683-17:1999			
02	Inner ring	1	Steel 100CrMnSi6-4—ISO 683-17:1999			
01	Outer ring	1	Steel 100CrMnSi6-4—ISO 683-17:1999			
No.	Designation	Qty	Material	unit	toatl	Remark
				Weight (kg)		

Luoyang JCB Bearing Technology Co., Ltd  
 Contact information  
 Company Address : No. 285, Fenghua road,  
 Luoyang, Henan, China.  
 Postal code : 471000  
 Phone :86-379-68611678  
 Fax : 86-379-68611679  
 E-mail: sales@jcb-bearing.com  
 Reserved E-mail: sales@sphericalrollerbearing.net  
 Website: www.jcb-bearing.com  
 www.sphericalrollerbearing.net

### Spherical Roller Bearing

238/1180 CAKFA/W20

			Weight (kg)	Scale
S			47.4	—
Total page 5			Page No. 1	