


240/850 ECAK30/W33



/// V<sub>Cs</sub> A

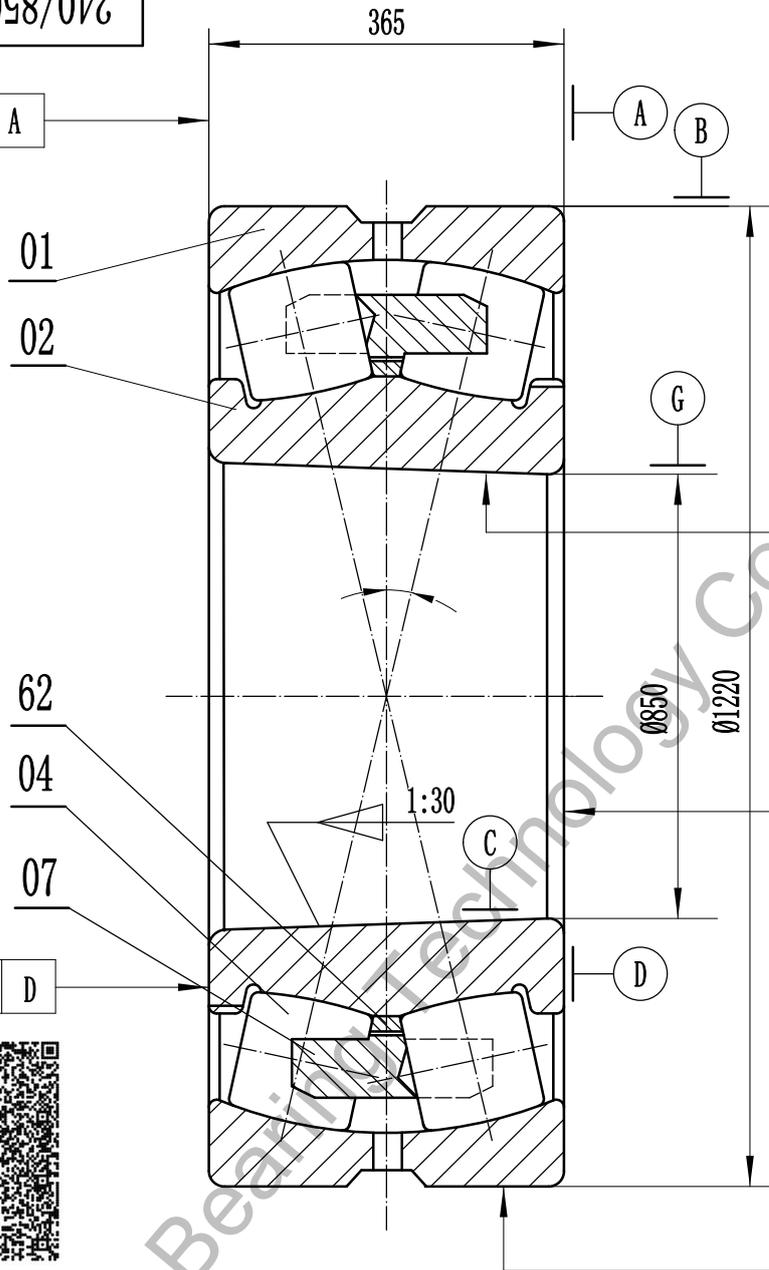

○ V<sub>dsp</sub>  
 / V<sub>dmp</sub>  
 / K<sub>ia</sub> B

/ S<sub>d</sub> G

/// V<sub>Bs</sub> D



○ V<sub>Dsp</sub>  
 / V<sub>Dmp</sub>  
 / K<sub>ea</sub> C  
 ∇ S<sub>D</sub> A

- 1、Tolerance of running accuracy are according to relevant state standard;
- 2、The value of the basic group of radial clearance:min \*\*\*\* max \*\*\*\*;
- 3、Rated load: Cr= \*\*\*\* kN Cor= \*\*\*\* kN.

62	Guide ring		Steel 20—GB/T699			
07	Cage		Brass CuZn39Pb2—EN 1652:1997			
04	Roller		Steel 100CrMnSi6-4—ISO 683-17:1999			
02	Inner ring		Steel 100CrMnSi6-4—ISO 683-17:1999			
01	Outer ring		Steel 100CrMnSi6-4—ISO 683-17:1999			

No.	Designation	Qty	Material	unit	total	Remark
				Weight (kg)		

Luoyang JCB Bearing Technology Co., Ltd Contact information Company Address : No. 285, Fenghua road, Luoyang, Henan, China. Postal code : 471000 Phone :86-379-68611678 Fax : 86-379-68611679 E-mail: sales@jcb-bearing.com Reserved E-mail: sales@sphericalrollerbearing.net Website: www.jcb-bearing.com www.sphericalrollerbearing.net	<h2>Spherical Roller Bearing</h2>		240/850 ECAK30/W33		
					Weight (kg)
	S				—
	Total page 5		Page No. 1		
	Luoyang JCB Bearing Technology Co., Ltd				