

///	V _{Cs}	A
-----	-----------------	---

01


02

62

04

07

///	V _{Bs}	D
-----	-----------------	---

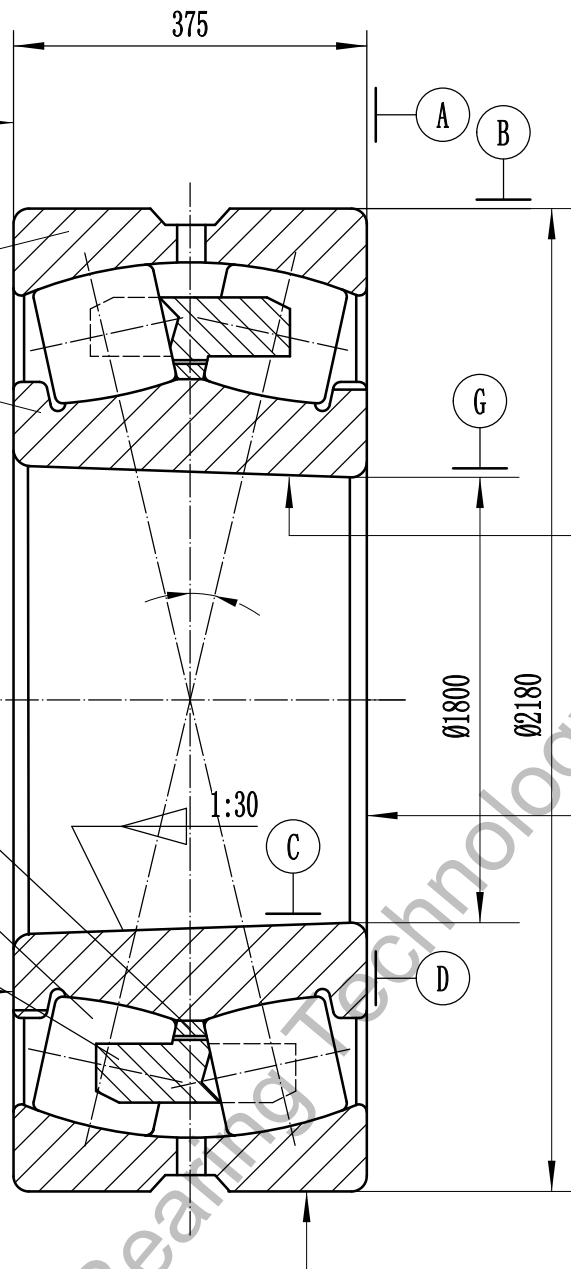

⊖	V _{dsp}	
⊖	V _{dmp}	
⚡	K _{ia}	B

⚡	S _d	G
---	----------------	---

⊖	V _{Dsp}	
⊖	V _{Dmp}	
⚡	K _{ea}	C
⚡	S _D	A

- 1、Tolerance of running accuracy are according to relevant state standard;
- 2、The value of the basic group of radial clearance:min **** max ****;
- 3、Rated load: Cr= **** kN Cor= **** kN.

62	Guide ring		Steel 20—GB/T699								
07	Cage		Steel St 52-EN 10025:1990 + A:1993								
04	Roller		Steel 100CrMnSi6-4—ISO 683-17:1999								
02	Inner ring		Steel 100CrMnSi6-4—ISO 683-17:1999								
01	Outer ring		Steel 100CrMnSi6-4—ISO 683-17:1999								
No.	Designation	Qty	Material	unit	toatl	Remark					
				Weight (kg)							
Luoyang JCB Bearing Technology Co., Ltd Contact information Company Address : No. 285, Fenghua road, Luoyang, Henan, China. Postal code : 471000 Phone :86-379-68611678 Fax : 86-379-68611679 E-mail: sales@jcb-bearing.com Reserved E-mail: sales@sphericalrollerbearing.net Website: www.jcb-bearing.com www.sphericalrollerbearing.net			Spherical Roller Bearing			248/1800 CAK30FA/W33					
								Weight (kg)	Scale		
						S					——
						Total page 5			Page No. 1		
									Luoyang JCB Bearing Technology Co., Ltd		