


VCs A

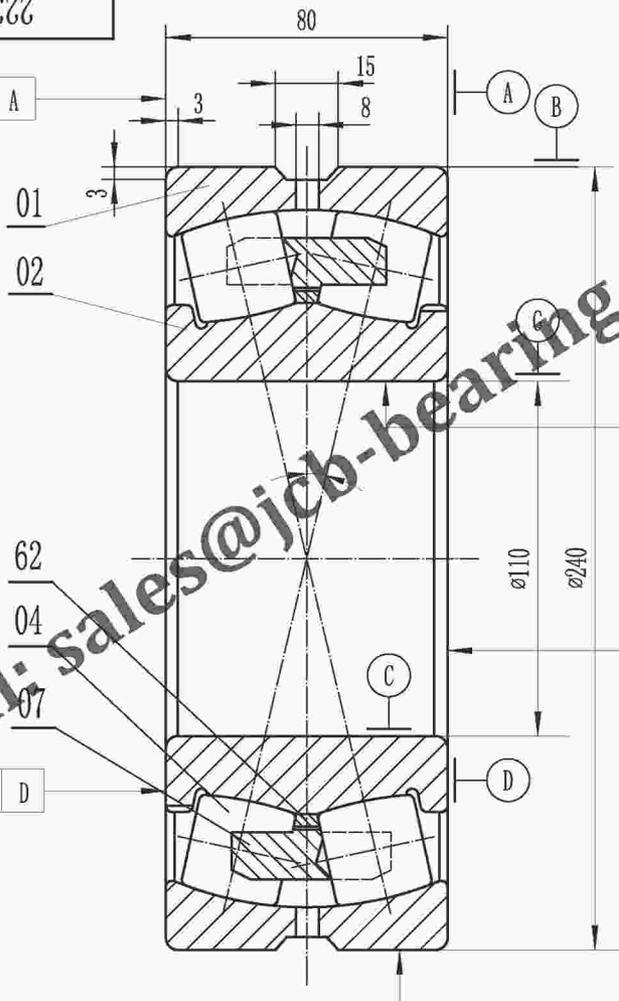

V_{dsp}
V_{dmp}
K_{ia} B

S_d G

V_{Dsp}
V_{Dmp}
K_{ea} C
S_D A

1. Tolerance of running accuracy are according to relevant state standard;
2. The value of the basic group of radial clearance: min 0.075 max 0.120 ;
3. Rated load: Cr=950 kN Cor=1070 kN.

| | | | | | |
|----|------------|---|------------------------------------|--|--|
| 62 | Guide ring | 1 | Steel 20—GB/T699 | | |
| 07 | Cage | 2 | Brass CuZn39Pb2—EN 1652:1997 | | |
| 04 | Roller | | Steel 100CrMnSi6-4—ISO 683-17:1999 | | |
| 02 | Inner ring | 1 | Steel 100CrMnSi6-4—ISO 683-17:1999 | | |
| 01 | Outer ring | 1 | Steel 100CrMnSi6-4—ISO 683-17:1999 | | |

| No. | Designation | Qty | Material | unit | total | Remark |
|-----|-------------|-----|----------|-------------|-------|--------|
| | | | | Weight (kg) | | |

| | | | |
|--|-----------------------------------|--------------|------------------|
| <p>Luoyang JCB Bearing Technology Co., Ltd Contact information Company Address : No. 285, Fenghua road, Luoyang, Henan, China. Postal code : 471000 Phone :86-379-68611678 Fax : 86-379-68611679 E-mail: sales@jcb-bearing.com Reserved E-mail: sales@sphericalrollerbearing.net Website: www.jcb-bearing.com www.sphericalrollerbearing.net</p> | <h2>Spherical Roller Bearing</h2> | 22322-E1-XL | |
| | | S | Weight(kg) Scale |
| | | Total page 5 | 17.7 — |
| | | Page No. 1 | |
| Luoyang JCB Bearing Technology Co., Ltd | | | |