


21311 EK

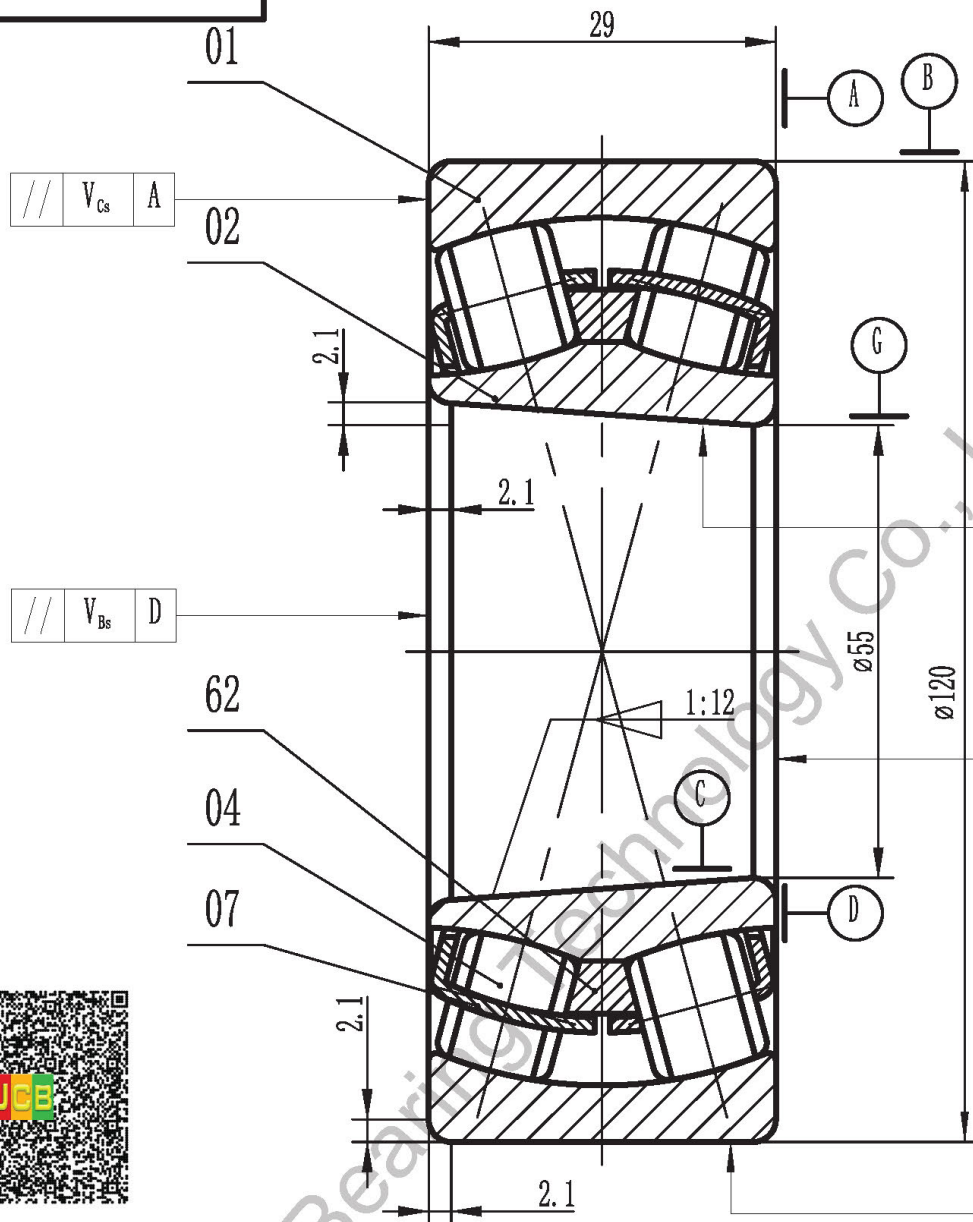

1. Tolerance of running accuracy are according to relevant state standard;
2. The value of the basic group of radial clearance: min 0.100 max 0.135;
3. Rated load: $C_r=640$ kN $C_{or}=740$ kN.

62	Guide ring		Steel 20—GB699			
07	Cage		Steel St 52-EN 10025:1990 + A:1993			
04	Roller		Steel 100Cr6—ISO 683-17:1999			
02	Inner ring		Steel 100Cr6—ISO 683-17:1999			
01	Outer ring		Steel 100Cr6—ISO 683-17:1999			
No.	Name	Qty	Material	Unit	Total	Remark
				Weight (kg)		

Luoyang JCB Bearing Technology Co., Ltd				21311 EK			
Contact information							
Company Address : No. 285, Fenghua road,							
Luoyang, Henan, China.							
Postal code : 471000							
Phone :86-379-68611678							
Fax : 86-379-68611679							
E-mail: sales@jcb-bearing.com							
Reserved E-mail: sales@sphericalrollerbearing.net							
Website: www.jcb-bearing.com							
www.sphericalrollerbearing.net							

Spherical Roller Bearing				Weight(kg)		Scale			
				S					—
				Total page 6			Page No. 1		
Luoyang JCB Bearing Technology Co., Ltd									